


Improve DPF Performance & Save Money

Engine Pre-heat | Reduced DPF Maintenance Costs



Reduce Filter Overloading, DEF Thaw Time, Face Plugging & Thermal Cracking

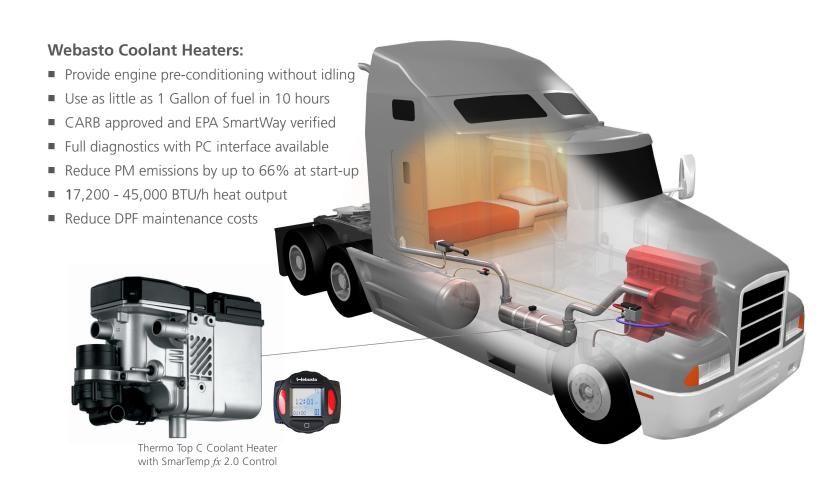

Independent testing shows that using a Webasto solution to pre-heat an engine can significantly improve DPF performance. Emissions are reduced, even at high ambient temperatures - this means that it is beneficial to pre-heat engines in warm and cold climates.

	Thermo Top C
Heating Capacity	8,600 – 17,200 BTU/h <i>(2.5 – 5.0 kW)</i>
Fuel	Diesel #1, Diesel #2 Arctic, Biodiesel B5 & B20
Fuel Consumption	0.08 – 0.16 gal/h (0.30 – 0.61 l/h)
Rated Voltage	12 V
Operating Voltage Range	10.5 – 15 V
Rated Input	3.8 Amps (46 W)
Water Flow	2 gal/min at 1.9 PSI (450 l/h at 0.13 bar)
Dimensions (L x W x H)	9.125 x 4.125 x 6.4 in (232 x 105 x 193 mm)
Weight	7 lbs (3.2 kg)

Available Thermo Top C Heater Kits:

Thermo Top C Diesel Kit w/SmarTemp Control fx 2.0 (12 V) - PN: 5010891A Thermo Top C Diesel Kit (12 V) - Part Number: 923369

Thermo Top C Diesel Kit w/enclosure (12 V) - Part Number: 5010087A


Standard Kit Components:

- Integrated Control Unit
- On/Off Switch
- Fuel Metering Pump w/Mounting Bracket
- Fuel Line
- Fuel Filter
- Universal Fuel Standpipe
- Exhaust Tubing
- Combustion Air Tubing
- Wiring Harness w/ Fuse Holder
- PC Interface Diagnostics
- Operation/Installation Manual
- 2 Year/2000 Hour Limited Warranty

Optional Accessories:

SmarTemp Control fx 2.0 - Part Number: 5010633C Heater Mounting Bracket - Part Number: 901088

System Schematic



- 1. Thermo Top C Heater
- 2. Heated Coolant Outlet
- 3. Cold Coolant Inlet
- 4. Fuel Pump
- 5. Fuel Line6. Fuel Pickup
- 7. Fuel Tank
- 8. Combustion Air Intake
- 9. Exhaust Tube
- 10. Circulation Pump
- 11. Fuel Filter

SmarTemp Control fx 2.0 (optional):

for Thermo Top C - Part Number 5010633C



- Programmable runtimes
- USB diagnostics
- Ergonomical design
- Large backlit LCD screen

Webasto Thermo & Comfort North America, Inc.

15083 North Road

Fenton, Michigan 48430

USA

Toll Free: 800-860-7866 Phone: 810-593-6000